RV Shelter SS133314P 13'x33'x14' W4.0xL10.0xH4.3m Assembly Instructions



RECOMMENDED TOOLS



Please read instructions <u>COMPLETELY</u> before assembly. This shelter <u>MUST</u> be securely anchored. THIS IS A TEMPORARY STRUCTURE AND NOT RECOMMENDED AS A PERMANENT STRUCTURE.

Before you start: 4+ individual recommended for assembly, approximate time 3 hr.

ATTENTION:

This shelter product is manufactured with quality materials. It is designed to fit our custom fabric cover included. Our shelters offer storage and protection from damage caused by sun, light rain, tree sap, animal - bird excrement and light snow. Please anchor this structure properly. See manual for more anchoring details. Proper anchoring, keeping cover tight and free of snow and debris is the responsibility of the consumer. Please read and understand the installation detail, warnings and cautions prior to beginning installation. If you have any questions contact your local dealer.

DANGER:

Prior to installation, choose the location of your shelter carefully._

DANGER: Keep away from electrical wires.

Check for overhead utility lines, tree branches or other structures. Check for underground pipes or wires before you dig. DO NOT install near roof lines or other structures that could shed snow, ice or excessive run off onto your shelter. DO NOT hang objects from the roof or support cables.





WARNING:

Risk of fire. DO NOT smoke or use open flame devices (including grills, fire pits, deep fryers, smokers or lanterns) in or around the shelter. DO NOT store flammable liquids (gasoline, kerosene, propane, etc.) in or around your shelter. Do not expose top or sides of the shelter to open fire or other flame source.





CAUTION:

Use **CAUTION** when erecting the frame. Use safety goggles during installation. Secure and bolt together overhead poles during assembly. Beware of pole ends.

PROPER ANCHORING AND INSTALLATION OF FRAME:

PROPER ANCHORING OF THE FRAME IS THE RESPONSIBILITY OF THE CONSUMER.

We are not responsible for damage to the unit or the contents from acts of nature. Any shelter that is not anchored securely has the potential to fly away causing damage, and is not covered under the warranty. Periodically check the anchors to ensure stability of shelter. We cannot be responsible for any shelter that blows away._

<u>NOTE:</u> Your shelter's cover can be quickly removed and stored prior to severe weather conditions. If strong winds or severe weather is forecast in your area, we recommend removal of cover.

CARE AND CLEANING:

A tight cover ensures longer life and performance. Always maintain a tight cover. Loose fabric can accelerate deterioration of cover fabric. Immediately remove any accumulated snow or ice from the roof structure with a broom, mop or other soft-sided instrument. Use extreme caution when removing snow from cover- always remove from outside the structure. DO NOT use hard-edged tools or instruments like rakes or shovels to remove snow. This could result in punctures to the cover. DO NOT use bleach or harsh abrasive products to clean the fabric cover. Cover is easily cleaned with mild soap and water.



WARRANTY:

This shelter carries a full limited warranty against defects in workmanship. We warrant to the Original Purchaser that if properly used and installed, the product and all associated parts, are free from manufacturer's defects for a period of:

1 YEAR FOR COVER FABRIC, END PANELS AND FRAMEWORK


RV Shelter W4.0xL10.0xH4.3m Parts List

Part Code	Descrip	tion of Parts	Qty(PC)
1	Roof Bent Joist		8
2	Sidewall Bent Joist (left)	EIL	7
2A	Sidewall Bent Joist for front door (left)	22.00	1
3	Sidewall Bent Joist (right)	EU &	7
3A	Sidewall Bent Joist for front door (right)	EL TO O	1
4	Upright	[·]:3	14
4A	Upright for back end	E- E-	2
5	Purlin		28
5A	Roof Purlin		7
6	Roof Bracing Tube		7
6A	Roof Bracing Tube for back end		1
7	Sidewall Bracing Tube	€ =	4
8	Lower Tensioning Tube (4pcs/set)		2 sets
9	Lower Portal for back end	- I	1
10	Upper Portal for back end	<u> </u>	1
11	Rail for back end		2
12	Tensioning Tube for back end		2
13	Base Plate for front door (left and right)		2
13A	Base Plate for back end (left and right)		2
14	Base Plate for middle arch		12
15	Base Plate for back end (middle)		1
16	Rod for Pulling Front Door		1


17	Angle Seat for portal (No.10) connection	2.6	1
18	Plastic Cap for tensioning tube (No.8)		4
19	Bolt M10x30 for connection plate		4+2
20	Bolt M10x90 for swaged tube		100+6
21	Carriage Bolt M12x100 for purlin (No.5, 5A)		57+4
22	Clip for bracing tube (No.7)	(gol)	8 sets
23	Stake Peg	P	52
24	Cable Tie for Roof Cover	<u> </u>	PE: 55 PVC: 70
25	Cable Tie for Front and Back Cover	<	PE: 60 PVC: 80
26	Knitting Rope for Roof Cover	(M) 500 M)	2 bundles
27	Knitting Rope for Back Cover	(an see si))	1 bundle
28	Knitting Rope for Front Door	H- 5-4 11	1 bundle
29	Band for Winch		16
30	Front and Back Cover		1 each
31	Roof Cover		1
32	Door Bracing Tube	3	1
33	Self-drilling Screw and tool for tube (No.32)		1 bag
34	Duct Tape		1 roll

Frame Installation


Step 1: base plates and stake pegs

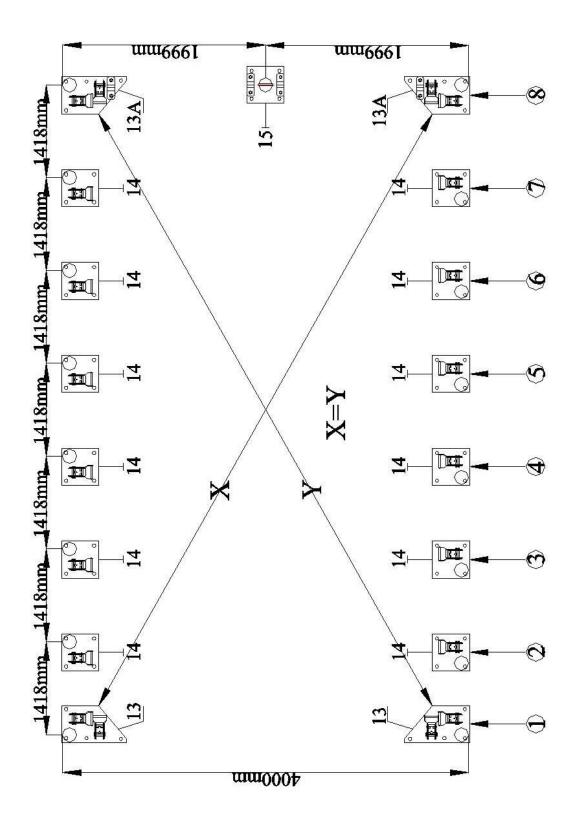


Step 2: first arch and roof bracing tube

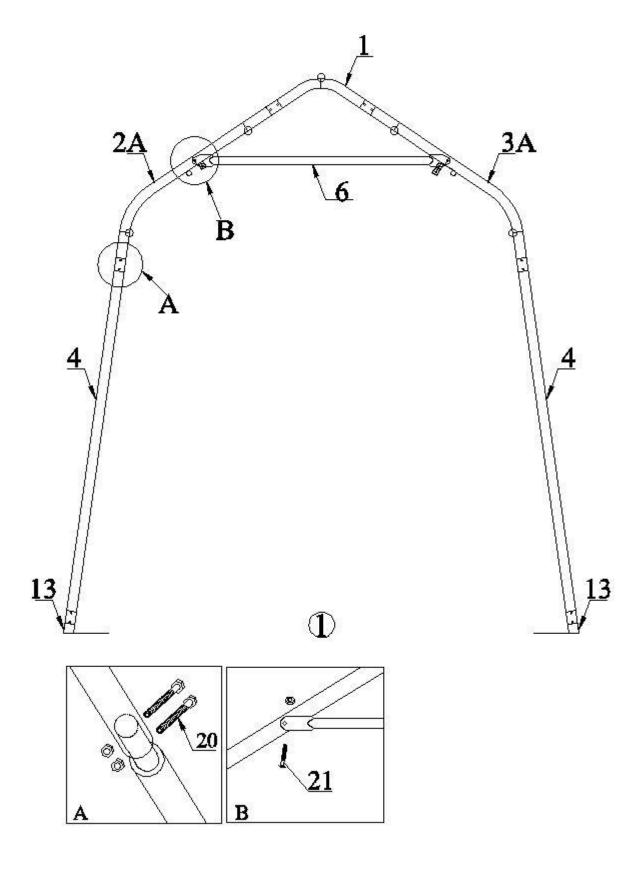

Step 3: middle arches and roof bracing tubes

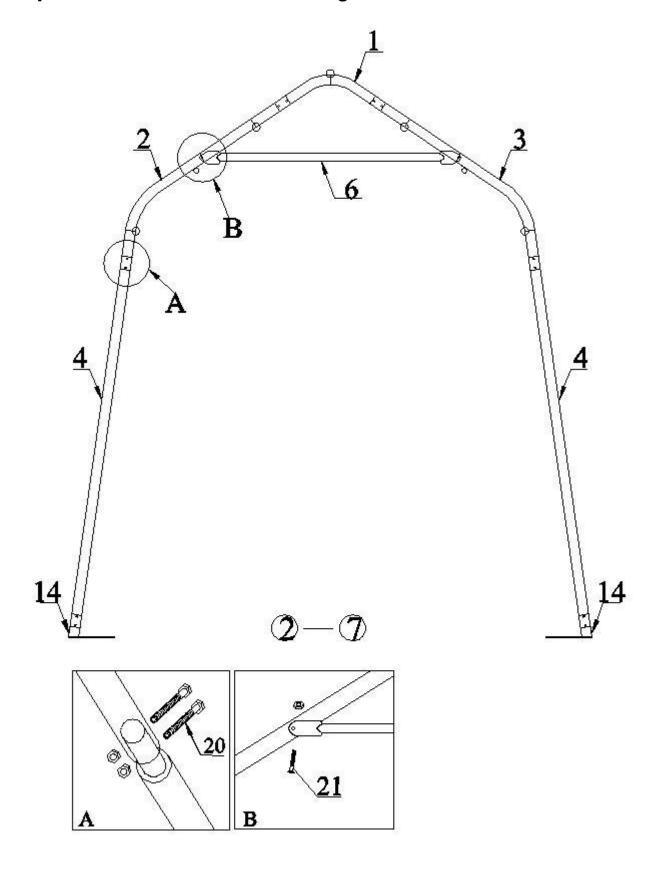


Step 4: last arch and roof bracing tube

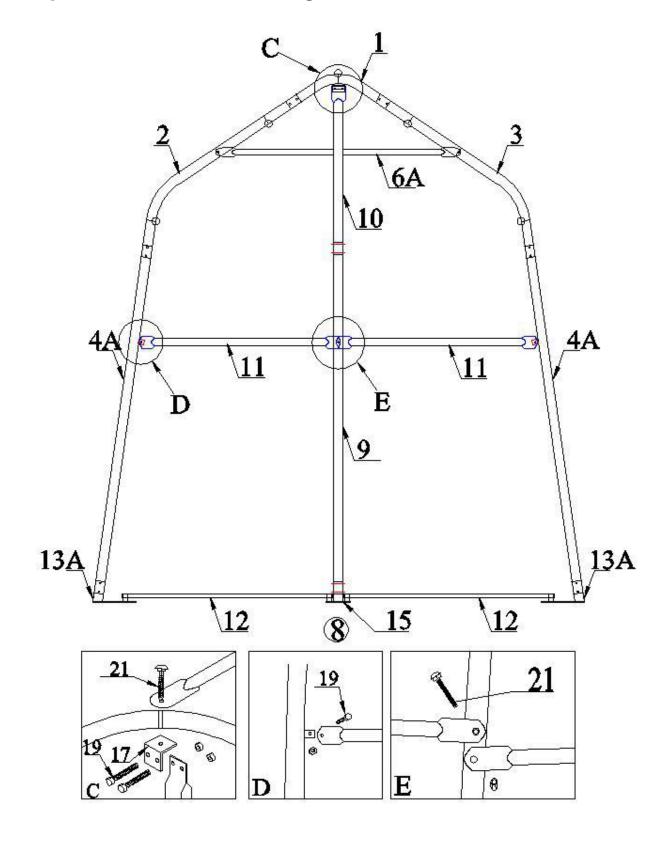


Step 5: purlins, sidewall bracing tubes and base plates

Step 6: squaring up the frame and fix base plates by stake pegs

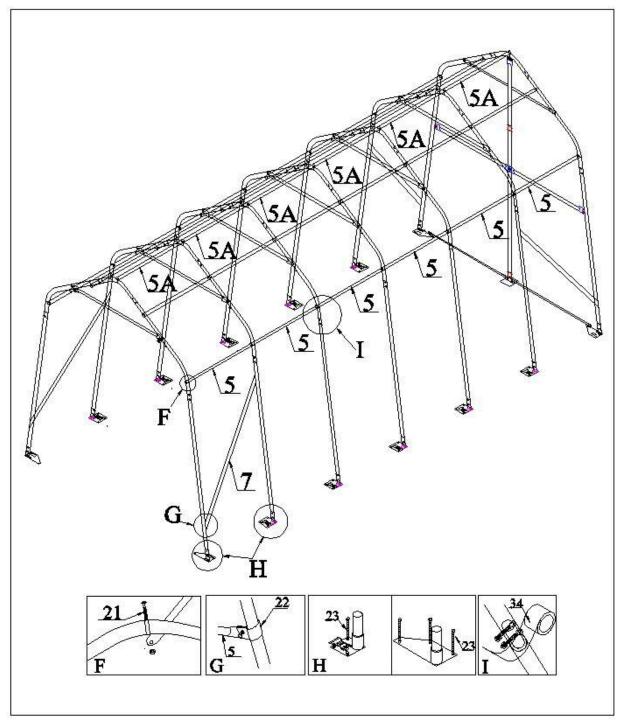


Cover Installation


Step 1: front cover with door

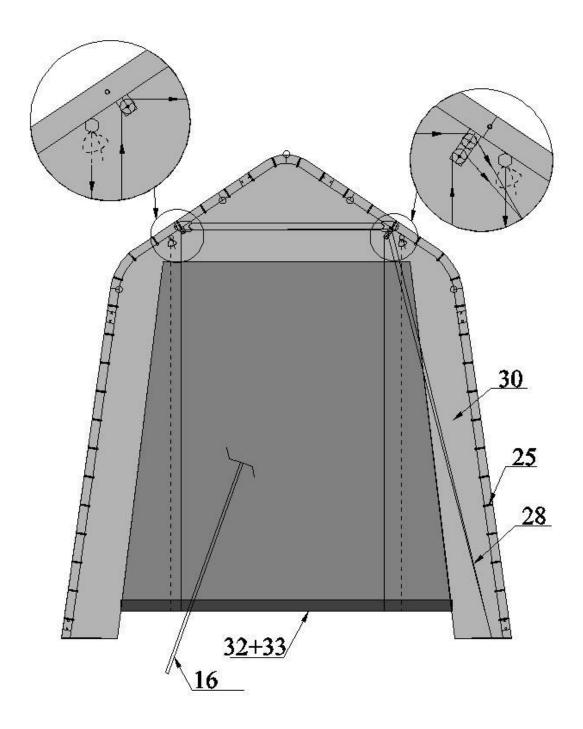

Step 2: back cover

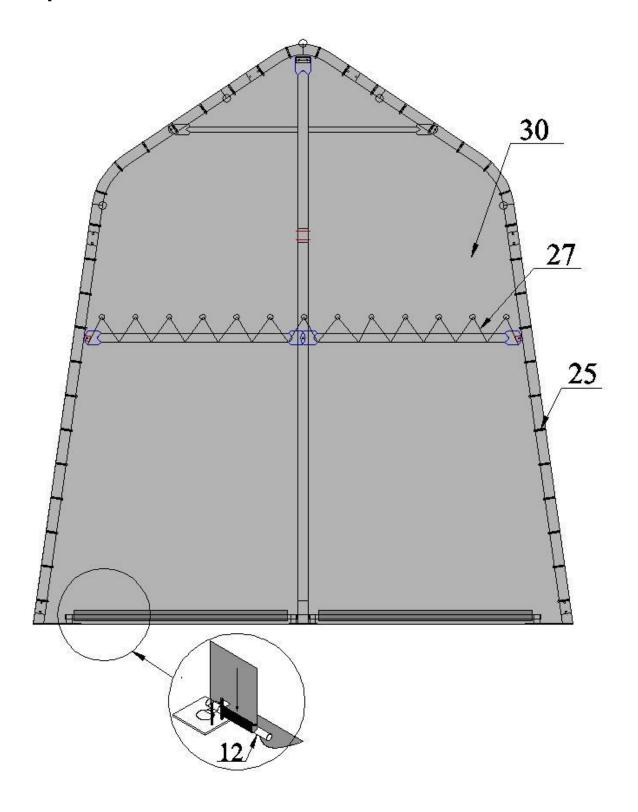

Step 3: roof cover

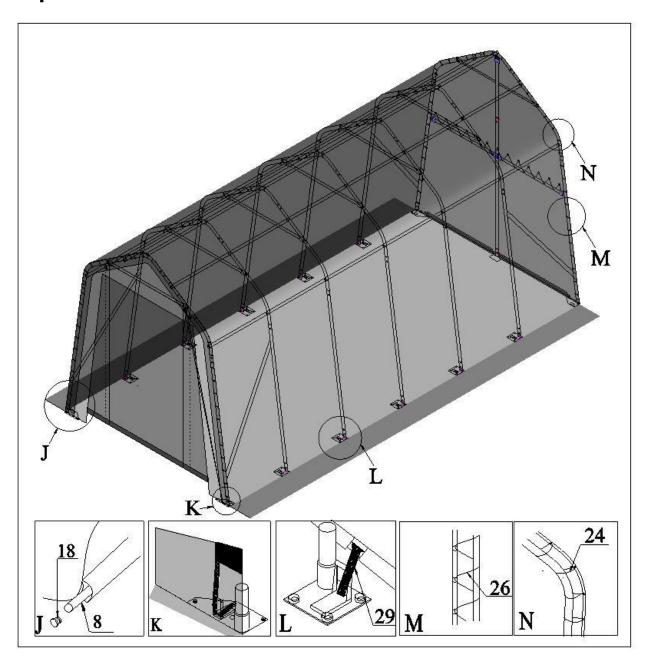

Now your assembly is completed.