

**HYDRAULIC WINCH
HWD8000、 HWD9000
HWD10000、 HWD12000
HWD13000**

Assembly & Operating Instructions


CONTENTS

INTRODUCTION.....	1
SAFETY WARNINGS AND PRECAUTIONS.....	2
WINCH WARNINGS AND PRECAUTIONS.....	3
UNPACKING.....	4
INSTALLATION.....	4
CLUTCH OPERATING DRAWING.....	7
OPERATION.....	8
WINCH ACCESSORIES YOU WILL NEED.....	10
RIGGING TECHNIQUES.....	10
LUBRICATION.....	11
CABLE ASSEMBLY REPLACEMENT.....	11
TROUBLE SHOOTING.....	12
WINCH ASSEMBLY DRAWING HWP SERIES A/YD.....	13
WINCH PARTS LIST HWP SERIES A/YD.....	14
SPECIFICATION (HWD8000A/YD)	15
SPECIFICATION (HWD9000A/YD)	16
SPECIFICATION (HWD10000A/YD)	17
SPECIFICATION (HWD12000A/YD)	18
SPECIFICATION (HWD13000A/YD)	19

INTRODUCTION

Your HWD series winch is part of our new product line and has its own salient features: two speeds, single shaft clutch and speed control, and automatic reducer gear engagement. There are three positions of reducer gear engagement, high gear, low gear, and free spool. This new technology has made winches the pinnacle in user convenience and reliability. You will take pride in knowing that your new winch has been designed to work as hard as you and that it will be there when you need it.

Congratulations on your purchase of a highest class advanced powerful two speed winch. We design and build winches to strict specifications and with proper use and maintenance should bring you years of satisfying service.

 **WARNING** - Read, study and follow all instructions before operating this device. Failure to heed these instructions may result in personal injury and/or property damage.

Your winch can develop tremendous pulling forces and if used unsafely or improperly could result in property damage, serious injury or death. Throughout this manual you will find the following symbols for caution, warning and danger. Pay particular attention to the notes preceded by these symbols as they are written for your safety. Ultimately, safe operation of this device rests with you, the operator.

 **CAUTION**

This indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury. This notation is also used to

alert you against unsafe practices.

 **WARNING**

This indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

SAFETY WARNINGS AND PRECAUTIONS

⚠ WARNING: When using the tool, basic safety precautions should always be followed to reduce the risk of personal injury and damage to the equipment. Read all this instructions before using this tool!

⚠ WARNING – Keep children away. Children must never be allowed in the work area. Do not let them handle machines, tools, or extension cords.

⚠ WARNING – Store idle equipment. When not in use, tools must be stored in a dry location to inhibit rust. Always lock up tools and keep out of reach of children.

⚠ WARNING – Dress properly. Do not wear loose clothing or jewelry as they can be caught in moving parts. Protective, electrically non-conductive clothes and non-skid footwear are recommended when working. Wear restrictive hair covering to contain long hair.

⚠ WARNING – Use eye and ear protection. Always wear impact safety goggles. Wear a full face shield if you are producing metal filings or wood chips. Wear a dust mask or respirator when working around metal, wood, and chemical dusts and mists.

⚠ WARNING – Maintain tools with care. Keep tools sharp and clean for better and safer performance. Follow instructions for lubricating and changing accessories. Inspect tool cords periodically and, if damaged, have them repaired by an authorized technician. The handles must be kept clean, dry, and free from oil and grease at all times.

⚠ WARNING – Disconnect switch. Unplug switch when not in use.

⚠ WARNING – Stay alert. Watch what you are doing, use common sense. Do not operate any tool when you are tired.

⚠ WARNING – Check for damaged parts. Before using any tool, any part that appears damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment and binding of moving parts; any broken parts or mounting fixtures; and any other condition that may affect proper operation. Any part that is damaged should be properly repaired or replaced by a qualified technician. Do not use the tool if any switch does not turn "On" and "Off" properly.

SPECIFICATION(HWD13000A/YD)

Rated line pull	13000 lbs (5897 kgs)	
Motor displacement	80ml/r	
Oil flow	5~60L/min	
Pressure	8Mpa	
Gear reduction ratio	High speed: 13.6:1; Low speed: 42.2:1	
Cable (Dia. × L)	Ø13/32 " × 83.7 ' (Ø10.2mm × 25.5m)	
Drum size (Dia. × L)	Ø2.6 " × 8.54" (Ø66mm × 217mm)	
Mounting bolt pattern	10 " × 4.5 " (254mm × 114.3mm) 4-M12	
Item	HWD13000A	HWD13000YD
Overall dimensions (L × W × H)	23.07" × 6.89" × 6.9" 586mm × 175mm × 176mm	24.6" × 7.9" × 7.52" 625mm × 201mm × 191mm
Net weight lbs(kg)	105(47.5)	105(47.6)

Pull , Speed, Pressure, Flow (First layer)

Line pull lbs (kgs)		Pressure Mpa(Psi)	Flow G/min (L/min)	Line speed ft/min(m/min)	
Low speed	High speed			Low speed	High speed
0	0	2.0(290.1)	1.3(5)	1.0(0.3)	3.3(1.0)
3000(1814)	2000(907)	3.4(494.7)	2.6(10)	2.0(0.6)	6.9(2.1)
6000(2722)	3000(1361)	4.8(698.4)	5.2(20)	4.3(1.3)	13.8(4.2)
9000(4082)	4000(1814)	6.2(902.1)	10.6(40)	8.9(2.7)	27.2(8.3)
13000(5897)	5000(2268)	8.0(1164)	15.8(60)	13.1(4.0)	41.0(12.5)

Line pull, cable capacity and the line speed per layer

Layer of wire rope	Rated line pull lbs(kgs)	Total rope on drum ft (m)	White oil flow 20L/min	
			Low speed	High speed
1	13000(5897)	15.7(4.9)	4.3(1.3)	13.8(4.2)
2	10167 (4612)	36.4(11.1)	5.6(1.7)	17.4(5.3)
3	8347(3786)	60.0(18.3)	6.9(2.1)	21.0(6.4)
4	7080(3212)	83.7(25.5)	7.9(2.4)	24.6(7.5)

SPECIFICATION(HWD12000A/YD)

Rated line pull	12000 lbs (5443 kgs)	
Motor displacement	50ml/r	
Oil flow	5~50L/min	
Pressure	11Mpa	
Gear reduction ratio	High speed: 13.6:1;Low speed: 42.2:1	
Cable (Dia. × L)	Ø13/32 "× 83.7' (Ø10.2mm× 25.5m)	
Drum size(Dia. × L)	Ø2.6 "× 8. 54" (Ø66mm× 217mm)	
Mounting bolt pattern	10 "× 4.5 " (254mm× 114.3mm) 4-M12	
Item	HWD12000A	HWD12000YD
Overall dimensions (L×W×H)	22.83"× 6.89"× 6.9" 580mm × 175mm × 176mm	24.6"× 7.9"× 7.52" 625mm × 201mm × 191mm
Net weight lbs(kg)	102(45.9)	102(46.1)

Pull , Speed, Pressure, Flow (First layer)

Line pull lbs (kgs)		Pressure Mpa(Psi)	Flow G/min (L/min)	Line speed ft/min(m/min)	
Low speed	High speed			Low speed	High speed
0	0	2.0(290.1)	1.3(5)	1.6(0.5)	5.2(1.6)
3000(1814)	2000(907)	4.1(596.6)	2.6(10)	3.3(1.0)	10.8(3.3)
6000(2722)	3000(1361)	6.3(916.7)	5.3(20)	6.6(2.0)	21.6(6.6)
9000(4082)	4000(1814)	8.5(1236.8)	9.2(35)	12.5(3.8)	38.3(11.7)
12000(5443)	5000(2268)	11.0(1595.4)	13.2(50)	17.7(5.4)	54.4(16.6)

Line pull, cable capacity and the line speed per layer

Layer of wire rope	Rated line pull lbs(kgs)	Total rope on drum ft (m)	White oil flow 10L/min	
			Low speed	High speed
1	12000(5443)	15.7(4.8)	3.3(1.1)	10.8(3.3)
2	9563(4338)	36.4(11.1)	4.6(1.4)	13.8(4.2)
3	7949(3606)	60.0(18.3)	5.6(1.7)	16.7(5.1)
4	6801(3085)	83.7 (25.5)	6.2(1.9)	19.7(6.0)

⚠ WARNING – Replacement parts and accessories. When servicing, use only identical replacement parts. Use of any other parts will void the warranty. Only use accessories intended for use this tool.

⚠ WARNING – Do not operate tool if under the influence of alcohol or drugs. Read warning labels on prescription to determine if your judgment or reflexes are impaired while taking drugs. If there is any doubt, do not operate the tool.

WINCH WARNINGS AND PRECAUTIONS

⚠ WARNING – Keep hands and body away from Fairlead (cable intake slot) when operating.

⚠ WARNING – Secure vehicle in position before using winch.

⚠ WARNING – Be certain winch is properly bolted to a structure (or vehicle) that can hold the winch load.

⚠ WARNING – Do not use inappropriate attachments to extend the length of the winch cable.

⚠ WARNING – Never lift people or hoist loads over people.

⚠ WARNING – Never come in between the winch and the load when operating.

⚠ WARNING – Do not apply load to winch when cable is fully extended. Keep at least 5 full turns of cable on the spool.

⚠ WARNING – After moving an item with the winch, secure the item. Do not rely on the winch to hold it for an extended period.

⚠ WARNING – Examine winch before using. Components may be affected by exposure to chemicals, salts, and rust.

⚠ WARNING – Never operate winch if cable shows any signs of weakening, such as knotting or kinking.

⚠ WARNING – Do not cross over or under cable when the winch is under load.

⚠ WARNING – Do not move your vehicle with the cable extended and attached to the load. You could easily exceed the winch rating and snap the cable.

⚠ WARNING – Use gloves while handling cable.

⚠ WARNING – When the vehicle is parked on an incline you should use wheel chocks.

⚠ WARNING – Re-spool cable properly avoiding cable misalignment.

⚠ WARNING – The winch cable must be wound onto the drum under a load of at least 10% of the rated line pull or the outer wraps will draw into inner wraps and damage winch cable

⚠ WARNING – Before operating the winch under load you should check proper function of the winch by engaging and disengaging the clutch, by operating the directional controls, and operating the speed controls. This will ensure that the winch is working properly and will help prevent unintended damage and injury. Cycling the winch prior to loading will also ensure the gears are properly aligned.

UNPACKING

When unpacking, check to make sure all parts are included. Refer to Assembly Drawings and Parts List (both with the like item numbers) at the end of this manual.

INSTALLATION

- Your winch is designed with a bolt pattern that is standard in this class of winch. Many winch mounting kits are available that utilize this bolt pattern for the most popular vehicle and mounting channels. If you will utilize the mounting channel you must ensure that it is mounted on a flat surface so that the three major sections (motor, drum and gear housing) are properly aligned. Proper alignment of the winch will allow even distribution of the full rated load.
- Start by connecting the roller fairlead (Part# HD1000700) to the mounting channel (Part# HD1000800) using 2 each of the cap screw M10 X 35 (Part# HD1000030), flat washer (Part# HD1000029), lock washer (Part# HD1000028) and securing with the locknut M10 (Part# HD1000027) (Make sure the screw is placed through the mounting channel and roller fairlead from inside the channel. This will allow enough clearance for the winch to be placed in the channel without obstruction.)
- Assemble the winch to the mounting channel (Part# HD1000800) by first pulling and releasing the clutch knob to "Free Spool" position. Pull out a few inches of cable

SPECIFICATION(HWD10000A/YD)

Rated line pull	10000 lbs (4536 kgs)	
Motor displacement	50ml/r	
Oil flow	5~50L/min	
Pressure	9.5Mpa	
Gear reduction ratio	High speed: 13.6:1;Low speed: 42.2:1	
Cable (Dia. × L)	Ø3/8 "×85' (Ø9.2mm×26m)	
Drum size(Dia. × L)	Ø2.6 "×8.54" (Ø66mm×217mm)	
Mounting bolt pattern	10 "×4.5 " (254mm×114.3mm) 4-M12	
Item	HWD10000A	HWD10000YD
Overall dimensions (L×W×H)	22.83"×6.89"×6.9" 580mm ×175mm ×176mm	24.6"×7.9"×7.52" 625mm ×201mm ×191mm
Net weight lbs(kg)	99(44.9)	99(45)

Pull , Speed, Pressure, Flow (First layer)

Line pull lbs (kgs)		Pressure Mpa(Psi)	Flow G/min (L/min)	Line speed ft/min(m/min)	
Low speed	High speed			Low speed	High speed
0	0	2.0(290.1)	1.3(5)	1.6(0.5)	5.2(1.7)
4000(1814)	2000(907)	4.5(652.6)	2.6(10)	3.3(1.0)	10.8(3.3)
6000(2722)	3000(1361)	6.3(916.7)	5.3(20)	6.9(2.1)	21.6(6.6)
8000(3629)	4000(1814)	7.7(1120.4)	9.2(35)	12.1(3.7)	37.7(11.5)
10000(4536)	4500(2041)	9.5(1382.2)	13.2(50)	17.4(5.3)	54.1(16.5)

Line pull, cable capacity and the line speed per layer

Layer of wire rope	Rated line pull lbs(kgs)	Total rope on drum ft (m)	White oil flow 10L/min	
			Low speed	High speed
1	10000(4536)	17.4(5.3)	3.3(1.0)	10.8(3.3)
2	7969(3615)	39.4(12.0)	4.3(1.3)	13.4(4.1)
3	6624 (3005)	65.0(19.8)	5.2(1.6)	16.1(4.9)
4	5667(2571)	85.3 (26.0)	5.9(1.8)	18.7(5.7)

SPECIFICATION (HWD9000A/YD)

Rated line pull	9000 lbs (4082kgs)	
Motor displacement	50ml/r	
Oil flow	5~50L/min	
Pressure	8.5Mpa	
Gear reduction ratio	High speed: 13.6:1; Low speed: 42.2:1	
Cable (Dia. × L)	Ø21/64 " × 95 ' (Ø8.3mm × 29m)	
Drum size (Dia. × L)	Ø2.6 " × 8.54" (Ø66mm × 217mm)	
Mounting bolt pattern	10 " × 4.5 " (254mm × 114.3mm) 4-M12	
Item	HWD9000A	HWD9000YD
Overall dimensions (L × W × H)	22.83" × 6.89" × 6.9" 580mm × 175mm × 176mm	24.6" × 7.9" × 7.52" 625mm × 201mm × 191mm
Net weight lbs(kg)	95(43.2)	95(43.3)

Pull , Speed, Pressure, Flow (First layer)

Line pull lbs (kgs)		Pressure Mpa(Psi)	Flow G/min (L/min)	Line speed ft/min(m/min)	
Low speed	High speed			Low speed	High speed
0	0	2.0(290.1)	1.3(5)	1.6(0.5)	5.2(1.6)
4000(1814)	2000(907)	4.5(652.6)	2.6(10)	3.3(1.0)	10.5(3.2)
6000(2722)	3000(1361)	6.3(916.7)	5.3(20)	6.6(2.0)	21.0(6.4)
8000(3629)	4000(1814)	7.7(1120.4)	9.2(35)	12.1(3.7)	37.4(11.4)
9000(4082)	4500(2041)	8.5(1236.8)	13.2(50)	17.1(5.2)	53.5(16.3)

Line pull, cable capacity and the line speed per layer

Layer of wire rope	Rated line pull lbs(kgs)	Total rope on drum ft (m)	White oil flow 10L/min	
			Low speed	High speed
1	9000(4082)	20.0(6.1)	3.3(1.0)	10.5(3.2)
2	7452(3380)	44.3(13.5)	4.3(1.3)	13.1(4.0)
3	6385(2884)	72.2(22.0)	4.9(1.5)	15.4(4.7)
4	5544(2515)	95.1(29.0)	5.9(1.8)	17.7(5.4)

from the drum and feed the wire loop through the opening in the front of the mounting channel and roller fairlead. Now, using the remaining cap screws M12 x 35 (Part# HD1000005) and lock washer (Part# HD1000004) secure the winch to the mounting channel.

4. Connect the two-color (positive) battery cable from the directional valve to screw-down positive (+) terminal to the 12/24 volt battery.
5. Please refer to installation illustration.

Mounting The Directional Solenoid Valve Assembly:

The valve should be mounted away from any areas where heat may be considered too extreme, such as an exhaust manifold or turbo. Be sure all plumbing and wiring reaches from the area is selected without being stressed. It may be mounted by using the bracket and allen screws supplied. Using the bracket as a guide, mark the location of where the mounting holes are going to be drilled, remove the plate and drill four 1/4" holes. Mount Valve Assembly using nuts, bolts.

If your winch is U type, the directional solenoid valve is combined to hydraulic motor already.

Note: On some vehicles grill may have to be removed to install plumbing and wiring for the winch.

Electrical Connections:


If winch's power supply is from the vehicle's exiting power steering pump, the solenoid valve system is designed default to the power steering box so power steering is always available even when the winch is in use. The power source to the solenoid is not energized until the three or four pole quick connector plug is plugged in. Each solenoid has two wires-either of which can be used as a ground or for electric power. The grounds are connected to each other at the factory. Connect all wiring to the battery as shown in illustration. Then test hand control unit, solenoids will make a slight "click" sound if connected properly.

Plumbing Connections:


Keep all hoses away from any areas where heat may be considered too extreme such as an exhaust manifold or turbo. Lines should not be allowed to rub on any abrasive or vibrating surfaces. In some applications, 90° fittings on the directional valve and motor or balance valve are necessary to make hose mounting more flexible. After plumbing has been laid out on vehicle, install o-ring fittings supplied to valve. Torque tight. Do not over tighten any fittings. Install o-ring fittings on Winch Motor. Torque tight. Connect any hose port A on motor to port A on directional valve, port B on motor to port B on directional valve, port P on directional valve to pump's high pressure port, port T on valve to reservoir, if necessary Connect any hose port S on valve to steering box. Attach any o-ring or seal from vehicles original tube fitting to tube fitting.

Working hydraulic principle chart and installation illustration:

A type

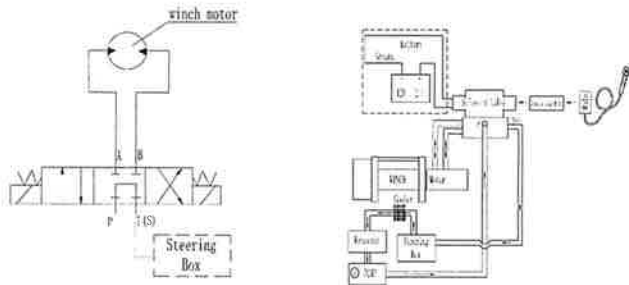

YD type

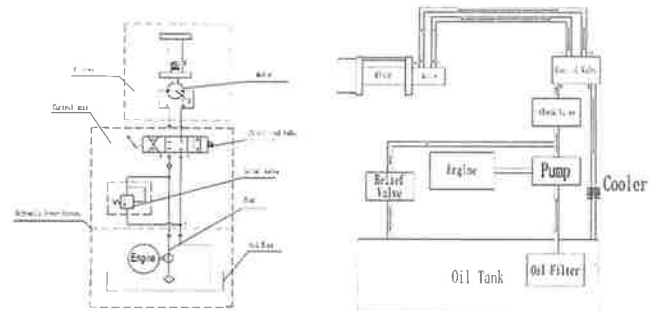

6

SPECIFICATION (HWD8000A/YD)

Rated line pull	8000 lbs (3629kgs)	
Motor displacement	36ml/r	
Oil flow	5~45L/min	
Pressure	10Mpa	
Gear reduction ratio	High speed: 13.6:1; Low speed: 42.2:1	
Cable (Dia. × L)	Ø21/64 " × 95 ' (Ø8.3mm × 29m)	
Drum size (Dia. × L)	Ø2.6 " × 8. 54" (Ø66mm × 217mm)	
Mounting bolt pattern	10 " × 4.5 " (254mm × 114.3mm) 4-M12	
Item	HWD8000A	HWD8000YD
Overall dimensions (L×W×H)	22.72" × 6.89" × 6.9" 577mm × 175mm × 176mm	24.6" × 7.9" × 7.52" 625mm × 201mm × 191mm
Net weight lbs(kg)	93(42.0)	93(42.1)

Pull , Speed, Pressure, Flow (First layer)

Line pull lbs (kgs)		Pressure Mpa (Psi)	Flow G/min (L/min)	Line speed ft/min(m/min)	
Low speed	High speed			Low speed	High speed
0	0	2.0(290.1)	1.3(5)	2.3(0.7)	7.2(2.2)
4000(1814)	2000(907)	6.0(873)	2.6(10)	4.6(1.4)	14.4(4.4)
6000(2722)	3000(1361)	8.0(1164)	5.3(20)	9.2(2.8)	28.9(8.8)
8000(3629)	4000(1814)	10(1455)	9.2(35)	16.7(5.1)	51.8(15.8)
/	/	/	11.9(45)	20.3(6.2)	63.3(19.3)


Line pull, cable capacity and the line speed per layer

Layer of wire rope	Rated line pull lbs(kgs)	Total rope on drum ft (m)	White oil flow 10L/min	
			Low speed	High speed
1	8000(3629)	20.0(6.1)	4.6(1.4)	14.7(4.5)
2	6529(2962)	44.3(13.5)	5.6(1.7)	18.0(5.5)
3	5515(2502)	72.2(22.0)	6.6(2.0)	21.6(6.5)
4	4773(2165)	95.1(29.0)	7.5(2.3)	24.6(7.5)


**WINCH PARTS LIST
HWD SERIES A/YD**

No.	Part #	Qty	Description	Remark
1	HD1000001	2	Screw M12 x 30	
2	HD1000002	2	Lock Washer Φ12	
3	HD1000100	1	Hydraulic Motor	
4	HD1000003	1	Motor Bracket	
5	HD1000004	4	Lock Washer Φ12	
6	HD1000005	4	Cap Screw M12 x 35	
7	HD1000006	2	Bushing—Drum	
8	HD1000007	2	Ring Seals	
9	HD1000200	1	Brake / Shaft Assembly	
10	HD1000008	4	Screw M8x 30	
11	HD1000009	4	Lock Washer Φ8	
12	HD1000010	2	Tie Bar	
13	HD1000300	1	Drum Assembly	
14	HD1000011	1	Screw M8 x 10	
15	HD1000012	8	Screw M6x 20	
16	HD1000013	8	Lock Washer Φ6	
17	HD1000014	1	End Bearing	
18	HD1000015	1	Connecting Sleeve	
19	HD1000400	1	Gear Carrier Assembly (Output)	
20	HD1000500	1	Gear Carrier Assembly (Intermediate)	
21	HD1000600	1	Gear Sup. Assembly (Intermediate)	
22	HD1000016	2	Gasket	
23	HD1000017	1	Gear—Ring	
24	HD1000018	1	Spring	
25	HD1000019	1	Steel Ball	
26	HD1000020	1	Screw M5 x 12	
27	HD1000021	1	Clutch Handle	
28	HD1000022	1	Clutch Axes	
29	HD1000023	1	Positioning Piece Of Clutch	
30	HD1000024	1	Clutch Seat	
31	HD1000025	1	Clutch Screw	
32	HD1000026	8	Flat Washer Φ5	
33	HD1000027	2	Locknut M10	used in A type
34	HD1000028	2	Lock Washer Φ10	
35	HD1000029	2	Thin Flat Washer Φ10	used in A type
36	HD1000700	1	Roller Fairlead	used in A type
37	HD1000800	1	Mounting Channel	By Choice ,
38	HD1000030	2	Cap Screw M10 x 35	
39	HD1000900	1	Cable Assembly	
40	HD1001000	1	Strap	
41	HD1001100	1	Control Section Of A Type winch	used in A type
42	HD1001200	1	Control Section Of YD Type winch	used in YD type
43	HD1000031	8	Screw M5x 18	
44	HD1000032	9	Lock Washer Φ5	

The mounting drawing of A type

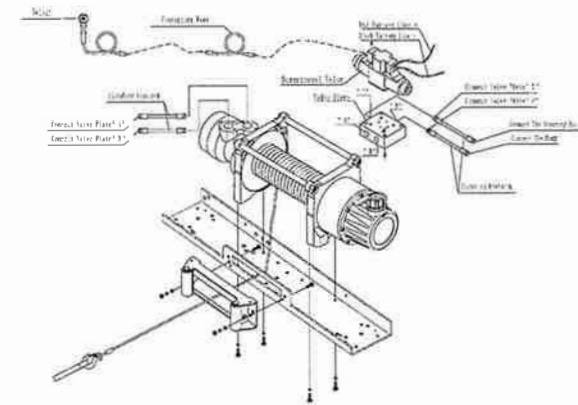

The mounting drawing of YD type



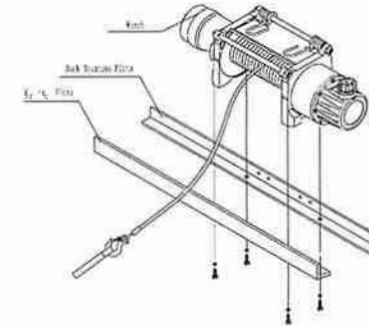


CLUTCH OPERATING DRAWING

LOW SPEED

FREE SPOOL

HIGH SPEED



**WINCH ASSEMBLY DRAWING
HWD SERIES A/YD**

⚠ Caution:

The hydraulic system needs a relief valve to ensure the system safety. The absence of such a valve could cause serious injury and damage the winch.

Winch battery cables should be placed so that there is a small amount of slack in the cable.

If you are using a heat exchanger with your application to cool the hydraulic fluid you should refer to the illustration about mounting.

You should check the hydraulic fluid level and replace any that may have seeped out. The hydraulic system should be purged at this time. Listed below are the directions on how to purge the hydraulic system.

- 1) Start the engine.
- 2) Power the winch to draw out about 5 feet of cable.
- 3) Shut down the engine.
- 4) Check the fluid level and fill as needed.
- 5) Repeat steps 1 through 4 as necessary.
- 6) Start the engine.
- 7) Move the cable into the desired position.
- 8) Turn the wheels on the vehicle from the right lock to the left lock positions five times to help bleed the hydraulic system.
- 9) If the hand control unit is working backwards, simple exchange the brown and the white wire connections within the valve.

Test the winch for proper operation. Refer to the section below.

OPERATION


⚠ WARNING

- 1 Make sure clutch is totally engaged before starting any winch operation;**
- 2 Stay clear and away from raised loads;**
- 3 Stay clear of cable while pulling do not try to guide cable;**
- 4 A min. of 5 wraps of cable around the drum barrel.**

General information:

The Winch's standard equipments contain gear reducer, drum, hydraulic motor, solenoid valve, switch assembly, female connector and plumbing fittings. The winch obtains its pressure from the vehicle's existing power steering pump or other hydraulic power. The winch is totally sealed, can be used underwater.


There are several other ways to supply power to the winch. The first way is to use an individual pump for engineering use. The second way is to provide the winch's

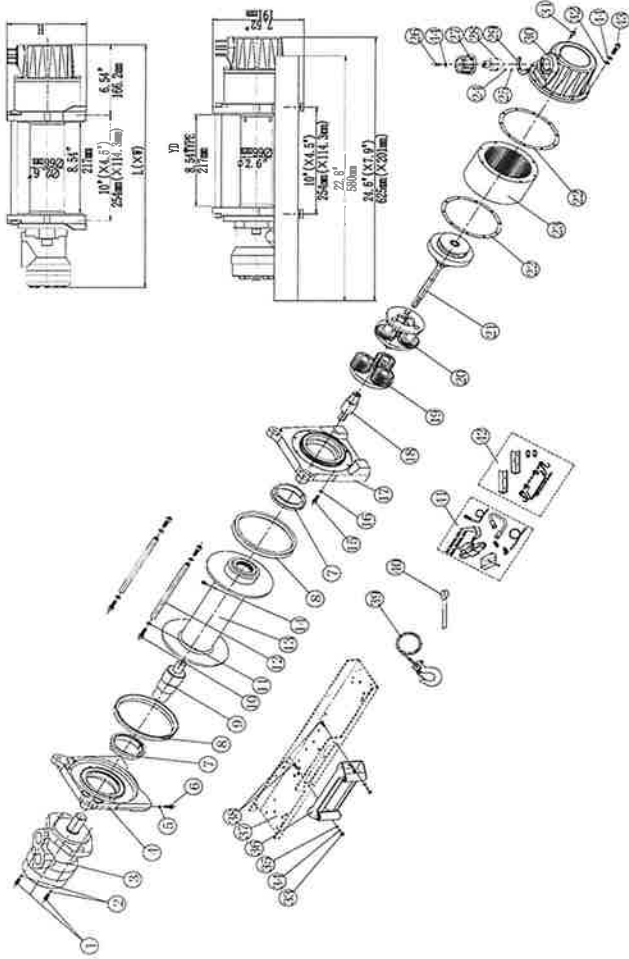

TROUBLE SHOOTING

SYMPTOM	POSSIBLE CAUSE	SUGGESTED ACTION
Winch does not turn	-Electrical connections have not connected properly	-Insert Switch Assembly all the way into connector. -Tighten nuts on all cable connections.
Motor runs but Cable drum does not turn	- The clutch is Not engaged	-Turn the clutch to the high or lows peed position. If problem still persists, a qualified technician needed to check and repair.
Winch drum runs slowly or without normal power.	-Insufficient pressure or oil flow - Insufficient fluid in the system	-Bump is not suitable or defective. Change a new one or a suitable one -Check fluid level. Add fluid until full.
Winch working direction is in backwards of the switch assembly.	-Electrical connections are in wrong direction in the valve solenoid.	-Simply exchange the blue and yellow wire connectors at the solenoid of directional valve, or change the oil pipe between the valve and motor.
Winch braking malfunction.	-Winch working in wrong direction. -Brake slice worn or worn not.	-Change winch working direction looking is to clockwise look at the motor end - Simply readjusted the braking angle or replaces the new brake slice.

⚠ WARNING - Brake angle adjustment method: Tighten the spring in the direction of rotation for two circles, then adjust the angle of spline gear sleeve by $20^{\circ} \pm 5^{\circ}$ (see below section view).



hydraulic pressure is with the vehicle's exiting power steering pump (See Installation Instructions).

① Use a suitable individual pump which doesn't have an oil pressure relief valve. It will supply pressure for both the steering box and the winch.

② Use a combined pump with an integrated oil valve. The oil valve will supply two kinds of flow based on the difference in demand. One type of flow will be constant and should be used with the steering system. The other will provide higher pressure and is for engineering use.

⚠ Caution:

Hydraulic system needs an relief valve to make sure the system is safe; If there is not relief valve in the system; it would be serious danger and the system can't operation. If your winch driven by an existing hydraulic power system, the relief valve is also existing.

Winch working demonstration:

1. Disengage the clutch by turning the clutch to the "Free Spool" position.
2. Grab the cable assembly (Part# HD1000900) and pull the cable to the desired length, then attach to item being pulled.

Caution: Always leave at least five turns of cable on the drum; Review Winch Safety Warnings and Precautions on page 2、 3 before continuing.

3. Reengage the clutch by turning the clutch Handle (Part# HD1000021) to the "High Speed" or "Low Speed" position as needed.
4. Insert the switch assembly connector onto the directional valve
5. Test-run winch in both directions. Turn the winch in each direction for about one or two seconds, meantime make the clutch totally engaged automatically.
6. While standing aside of the tow path, hold and operate the Switch Assembly supplied by your choice. Wait until the motor stops before reversing directions.
7. When the towing is finished, remove the switch assembly from the female connector of the directional valve and replace the female connector cover.

WINCH ACCESSORIES YOU WILL NEED

NOT INCLUDED WITH YOUR WINCH


Gloves – For handling the wire rope and hook strap.

Anchor Strap/Chain – Tree saver anchor straps are made of high quality nylon with high tensile strengths up to 15000lbs.

Heavy Blanket – place on the cable to absorb energy should the wire rope break.


RIGGING TECHNIQUES

Self-Recovery




Locate a suitable anchor such as a strong tree trunk or boulder.

Always use a sling as an anchor point. **CAUTION** Do not attach the clevis hook back onto the cable as this could cause damage to the cable. As shown in Fig 3.1




CAUTION Do not winch from an acute angle as the wire rope will pile up on one side of the drum causing damage to wire rope and the winch. Fig 3.2

Short pulls from an angle can be used to straighten the vehicle. Long pulls should be done with the wire rope at a 90° angle to the winch/vehicle.



When pulling a heavy load, place a blanket or jacket over the wire rope five or six feet from the hook. In the event of a broken cable it will dampen the snap back. For additional protection open the hood of the vehicle as shown in Fig 3.3



For pulls over 70% rated line pull, we recommend the use of the snatch block/pulley block to double line the wire rope. Fig 3.4

This reduces the load on the winch and the strain on the rope by up

to 50% depending on the included angle.



WARNING - Never use your winch for overhead hoisting or for lifting people or moving people.

LUBRICATION

1. All moving parts within the Winch having been Lubricated using high temperature lithium grease at the factory. No internal lubrication is required.
2. Lubricate Cable Assembly periodically using a light penetrating oil.

CABLE ASSEMBLY REPLACEMENT

If the wire rope has become worn or is beginning to show signs of strands breaking, it must be replaced before being used again.

1. Turning clutch to the "Free Spool" position.
2. Extend cable assembly to its full length. Note how the existing cable is connected to the drum.
3. Remove old cable assembly and attach new one as the old cable connected to the drum. Insert the end of the new rope and secure the screw M8 x10 (Part# HD1000011) being tightly screwed
4. Turning clutch to the "High Speed" position.
5. Retract cable assembly onto drum, first five wraps being careful not to allow kinking, then winch cable must be wound onto the drum under a load of at least 10% rated line pull.

WARNING - Only replace the wire rope with the identical replacement part recommended by the manufacturer.